



Light Grey

26766 007




Mid Grey

26766 006




Charcoal

26766 005




Midnight

26766 004



Dark Blue

26766 003

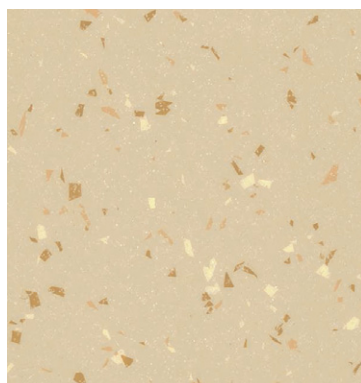

Latte

26766 014

TECHNICAL DATA	STANDARDS	Safetred		
		Ion Compact	Ion Loose Lay (LL)	Ion Acoustic
Classification				
Type of floor covering	EN 13845	Heterogeneous compact vinyl		
Classification	EN 13845 commercial industrial	Classes: 34 43		
Characteristics				
Total thickness	ISO 24346 (EN 428)	2.00mm	2.35mm	3.5mm
Total weight	ISO 23997 (EN 430)	3 340g/m²	3 410g/m²	3 750g/m²
Safety Clean XP™ PUR reinforcement	—	Yes		
Technical performances				
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles		
Residual indentation	Average measured value	≤ 0.10mm	≤ 0.11mm	0.15mm
	ISO 24343-1 (EN 433) requirement			≤ 0.20mm
Furniture leg	EN 424	No damage		
Castor chair	ISO 4918 (EN 425)	No damage		
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%		
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm		
Reaction to fire	EN 13501-1	B _s s1 on cement	C _{fl} s1 on cement	C _{fl} s1 on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz	> 36 R10 > 20µm		
Impact sound reduction	EN ISO 140-8 EN ISO 717/2	ΔL _w = 4dB	ΔL _w = 11dB	ΔL _w = 18dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete		
Light fastness	EN ISO 105-B02	7		
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances		
Hygiene	—	Does not contribute to infection spreading		
Thermal resistance Underfloor heating	EN 12524	0.01m² K/W Suitable - Max 27°C		
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 20lm x 2m (40m²)	Rolls: 15lm x 2m (30m²)	Rolls: 15lm x 2m (30m²)
Colours	—	20	20*	20*

* Available on request.

The above information is subject to modifications for the benefit of further improvement (07/2015).

For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request.

General Information



SAFETRED ION Contrast

Main Product Features

- Sustainable slip resistance throughout the product life
- Safety Clean XP™ PUR reinforced surface for improved stain resistance and ease of maintenance
- Extremely low VOCs contributing to better interior air quality
- Phthalate free

Surface Treatment



Sustainability Tag

Safetred Ion



Safetred Ion LL



Safetred Ion Acoustic



(1) For all products produced in 2015

Logistics Information

Safetred Ion Compact



Available in rolls
Rolls length: 20lm



Safetred Ion LL
Available in rolls
Rolls length: 15lm



Safetred Ion Acoustic
Available in rolls
Rolls length: 15lm

Laying direction:



Wood



Play with the Room Designer

SAFETRED ION



Linen Dark Blue




Midnight

26763 004




Charcoal

26763 005



Chocolate

26763 015



Rust

26763 001



Titanium

26763 009



Mid Grey

26763 006



Steel

26763 008



Latte

26763 014



Sand

26763 013



Light Grey

26763 007



Mint

26763 011



Sky Blue

26763 012



Dark Blue

26763 003

TECHNICAL DATA	STANDARDS	Safetred		
		Ion Compact	Ion Loose Lay (LL)	Ion Acoustic
Classification				
Type of floor covering	EN 13845	Heterogeneous safety floorings		
Classification	EN 13845 commercial industrial	Classes: 34 43		
Characteristics				
Total thickness	ISO 24346 (EN 428)	2.00mm	2.35mm	3.5mm
Total weight	ISO 23997 (EN 430)	3 410g/m²	3 410g/m²	3 750g/m²
Safety Clean XP™ PUR reinforcement	—	Yes		
Technical performances				
Abrasion	EN 13845 Annex D	≤10% particle loss after 50,000 cycles		
Residual indentation	Average measured value	≤ 0.10mm	≤ 0.11mm	0.15mm
	ISO 24343-1 (EN 433) requirement			≤ 0.20mm
Furniture leg	EN 424	No damage		
Castor chair	ISO 4918 (EN 425)	No damage		
Dimensional stability	ISO 23999 (EN 434)	≤ 0.40%		
Curl resistance to heat	ISO 23999 (EN 434)	≤ 2mm		
Reaction to fire	EN 13501-1	Bs s1 on cement	Cs s1 on cement	Cs s1 on cement
Slip resistance	TRRL Pendulum 4S (wet) BS 7976 part 2 DIN 51130 Surface Roughness Rz	> 36 R10 > 20µm		
Impact sound reduction	EN ISO 140-8 EN ISO 717/2	ΔL _w = 4dB	ΔL _w = 11dB	ΔL _w = 18dB
Electrical resistance	EN 1815 EN 1081 EN 14041	< 2kV on concrete > 10 ⁹ ohms. Antistatic on concrete		
Light fastness	EN ISO 105-B02	7		
Chemical resistance	ISO 26987 (EN 423)	Good resistance to everyday substances		
Hygiene	—	Does not contribute to infection spreading		
Thermal resistance Underfloor heating	EN 12524	0.01m² K/W Suitable - Max 27°C		
Form of delivery	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 20lm x 2m (40m²)	Rolls: 15lm x 2m (30m²)	Rolls: 15lm x 2m (30m²)
Colours	—	20	20*	20*

* Available on request.

The above information is subject to modifications for the benefit of further improvement (07/2015).

For more detailed technical information please contact Tarkett. Follow Tarkett's installation and maintenance instruction carefully, available on request.



Heather

General Information



According to European Classification EN 13845

SAFETRED ION Linen

Main Product Features

- Sustainable slip resistance throughout the product life
- Safety Clean XP™ PUR reinforced surface for improved stain resistance and ease of maintenance
- Extremely low VOCs contributing to better interior air quality
- Phthalate free

Surface Treatment



Sustainability Tag

Safetred Ion Linen Compact



Safetred Ion Linen LL



Safetred Ion Linen Acoustic



(1) For all products produced in 2015

Logistics Information

Safetred Ion Compact



Available in rolls
Rolls length: 20lm

Safetred Ion LL



Available in rolls
Rolls length: 15lm

Safetred Ion Acoustic



Available in rolls
Rolls length: 15lm

Laying direction:



Wood



Play with the Room Designer